

The DIGIDIM Infrared Remote Control is a DIGIDIM-compatible unit for controlling or configuring a DIGIDIM lighting control system. DIGIDIM control panels and sensors are fitted with an infrared receiver that allows them to be used in conjunction with the remote control.

This hand-held unit is fitted with seven buttons that control basic system functions such as on/off, raising and lowering the general light level and the selection of four scenes. The styling has been revised for 2016.

Basic programming functions can be performed with combinations of button presses. This includes address specific preset levels and scene settings.





Key Features

- Controls basic system functions.
- Programming tool for simple lighting systems (Designer or Toolbox software is used for advanced programming).
- Up to four lighting groups can be programmed.
- Can be used for setting scene fade time.

Additional Features

- Address switch permitting the use of multiple remotes and receivers, without cross interference, within one area. (The receivers must be programmed using Designer or Toolbox software.)
- Can control up to four lighting groups: on/off/up/down.

Dimensions (mm)

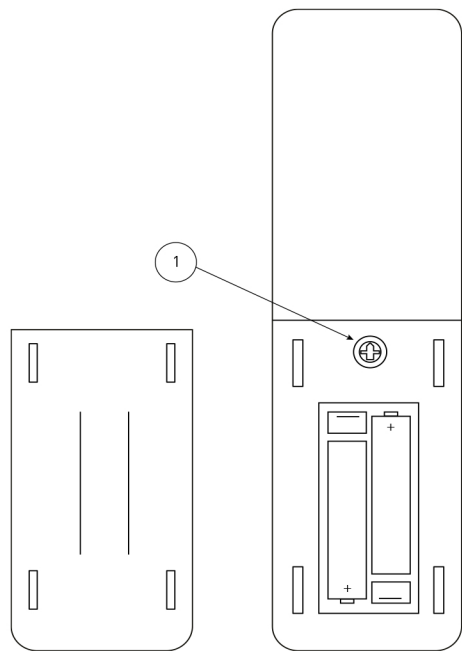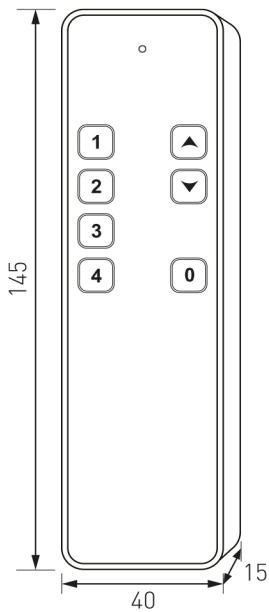

1. Sixteen-position address switch

Technical Data

Connections	
No external physical connections are necessary	
Electrical Data	
Power supply:	2 × IEC, LR03/AAA 1.5 V battery
Range	
Operating range:	Approximately 5 m: with ± 22.5° angle to panels with ± 63° angle to multisensors
Operation	
IR frequency:	36 kHz

Mechanical data	
Dimensions:	40 mm × 15 mm × 145 mm
Housing:	Matt dark grey, nonflammable polycarbonate, halogen free
Weight:	50 g
Operating Conditions	
Ambient temperature:	'0 °C to +40 °C
Relative humidity:	Max. 90 %, noncondensing
Storage temperature:	'-10 °C to +70 °C
Conformity and standards	
Conformity:	CE UK CA
Environment:	Complies with WEEE and RoHS directives.