


436 Gateway + PSU Kit

The 436 Gateway provides a simple interface to a router system and allows lighting system data to appear in a Building energy Management System.

The product allows a BMS to control and monitor the lighting system as well as obtain device status and group power consumption information. BMS clients can easily connect with the gateway via a TCP/IP network.



436 Gateway Application Controller

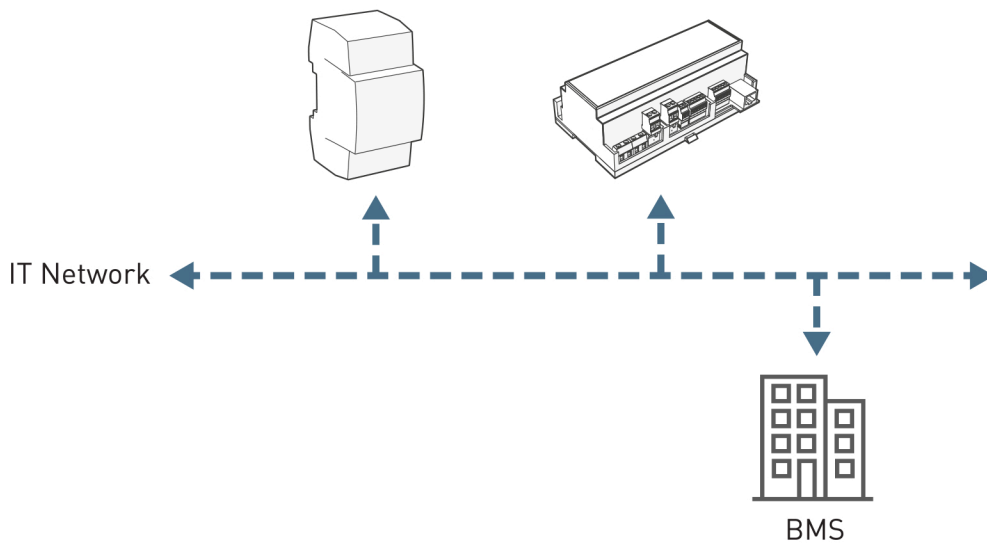

Key Features

- Supported protocols and modes: BACnet server, Modbus Slave
- workgroup discovery tool
- router selector
- Automatic point identification
- Browser programming interface

Device Limits

- Single workgroup
- 20 routers
- 300 groups
- 2000 Export points

Note: Certain project installations may require reduced limits if higher data frequency is required. See 436 User Guide for more information on this topic.


Available Export Points from Helvar System

See User Guide for more details.

| Type | Category | Parameter Name |
|--|---------------------------------|---|
| BACnet: AI Analogue Input Modbus: Analogue Read Only | Group | Active Power Consumption (DALI-2 Part 252 or Calculated) |
| | | Set Point (for selected regions only and only for BACnet) |
| | | Temperature (for selected regions only and only for BACnet) |
| | Device | Sensor Light Level |
| | | Active Power Consumption (DALI-2 Part 252 or Calculated) |
| | | Control Gear Operating Time (DALI-2 Part 253) |
| | | Light Sourcing Operating time (DALI-2 Part 253) |
| | Emergency (Group and Device) | Emergency Function Test State |
| | | Emergency Duration Test State |
| | | Emergency Battery Charge |
| | | Emergency Lamp Time |
| | | Emergency Total Lamp Time |
| | | Emergency Battery Endurance |
| | | Emergency Test Duration |
| | | Emergency Function Test Time |
| | Emergency Duration Test Time | |
| BACnet: AO Analogue Output Modbus: Analogue Read Only | Group | Intensity |
| | | Colour Temperature |
| | | Colour Coordinates |
| | | Direct Proportion |
| | | Modify Proportion |
| | | Store as Scene |
| | Device | Store as Scene |
| | Emergency | N/A |


| Type | Category | Parameter Name |
|---|---------------------------------------|----------------------------|
| BACnet: AV Analogue Value Modbus Analogue Read & Write | Group | Scene |
| | Device | Intensity |
| | | Colour Temperature |
| | | Colour Coordinates |
| Emergency | N/A | |
| BACnet: BI Binary Input Modbus: Binary Read Only | Group | N/A |
| | Device | Router Missing |
| | | Device Missing |
| | | Lamp Failure |
| | | Sensor PIR State |
| Emergency (Group and Device) | Emergency Battery Failure | |
| BACnet: BO Binary Output Modbus: Binary Write Only | Group | Temporary Max Level Enable |
| | | Temporary Min Level Enable |
| | Device | N/A |
| | Emergency (Group and Device) | Emergency Function Test |
| | | Emergency Duration Test |
| Stop Emergency Tests | | |
| | Reset Emergency Battery and Lamp Time | |

Connections



1. 2 Pin terminal port (24 VDC required)
2. Power LED
3. LAN Activity LED
4. Ethernet Port

Dimensions (mm)

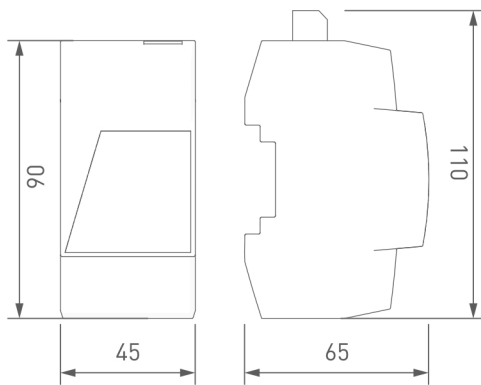

Technical Data

Connections

| | |
|----------------------|----------------------------|
| Connection type: | 1 × 10/100 Mb/s for TCP/IP |
| Default IP address: | 10.254.0.100 |
| Default subnet mask: | 255.0.0.0 |
| Power input: | 24 VDC |
| Power consumption: | 300 mA @ 24 VDC |


Operating and storage conditions

| | |
|----------------------|--------------------------|
| Ambient temperature: | 0 °C to +40 °C |
| Relative humidity: | Max. 90 %, noncondensing |
| Storage temperature: | -20 °C to +80 °C |

Mechanical data

| | |
|-----------------------------------|---------------------------------------|
| Dimensions (with power terminal): | 90 × 45 × 60 mm (110 × 45 × 60 mm) |
| Weight: | 120 g |
| Mounting: | DIN Rail |
| IP code: | IP20 |

Conformity and standards

| | |
|---------------|---|
| Conformity: |  |
| EMC emission: | EN 63044-5-1 |
| EMC immunity: | EN 63044-5-2 |
| Environment: | Complies with WEEE and RoHS directives. |

Compatibility

| | |
|-------------------------|-------------------------------|
| Helvar router firmware: | v5.8.5.6 and above |
| Web browsers: | Firefox (recommended), Chrome |
| Product name: | 436 Gateway + PSU Kit |
| Description | Gateway with 24VDC 0.63A PSU |