

318 Wall-Mounted PIR Presence/Absence Detector


The 318 Wall-Mounted PIR Presence/Absence Detector, used in conjunction with a lighting control system, provides automatic control of lighting loads in individual room spaces.

Typically used in spaces such as cellular offices or small meeting rooms, the 318 is also suitable for other applications where a wall-mounted sensor is preferred, or where the use of traditional ceiling mounted sensors is not possible.

A high-quality PIR (passive infrared) sensor enables the 318 to reliably detect movement in the space. The detector can switch on lights when a space is occupied, and dim (if controllable lighting loads are installed) and switch off when the space is unoccupied.

As well as the PIR sensor, the 318 has a touch control button that allows manual override of the lighting on/off, and light level adjustment if dimmable lighting is being controlled.

The 318 is in the format of a standard panel module. The module can be used with a single-gang panel surround to accommodate the 318 as a single unit. If used in the double-gang surround, the 318 can be incorporated with up to two other panel modules.

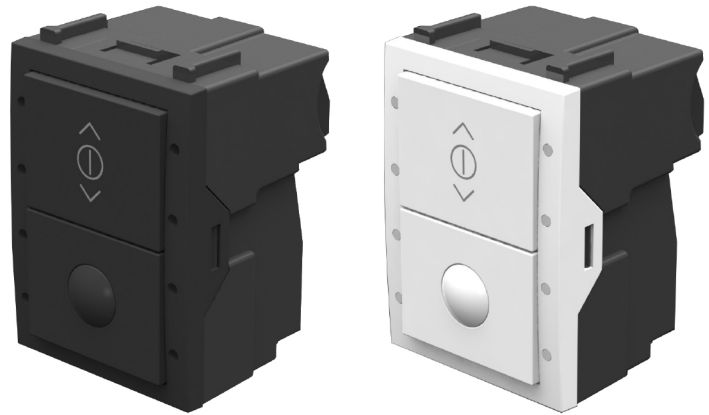


318B

318W

Key Features

- Controls lighting loads based on presence/absence detection.
- 5 m detection range.
- Manual Override/Dimming button built in.
- For wall mounting using panel surrounds.
- Available in black or white finish to match the button panel range.
- Simple connection and integration into a DALI control network.
- Programmable in Designer™ and Digidim Toolbox™.


Infrared Remote Control Range

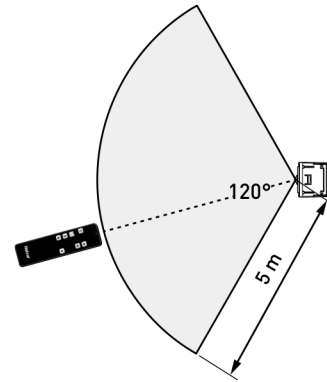


Note: 303 remote control must be ordered separately.

Detection Area



Walk Across

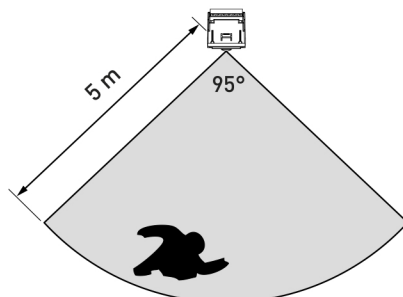

Walk Towards

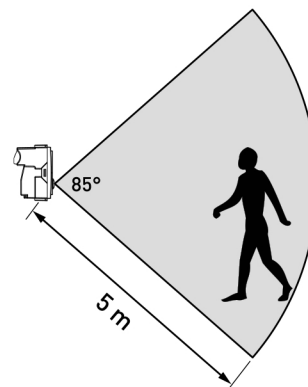


Connections

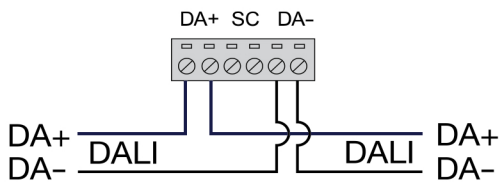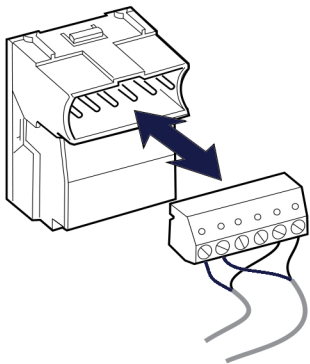


! Note: Make sure each connector is fully inserted into the modular panel!

Front Panel

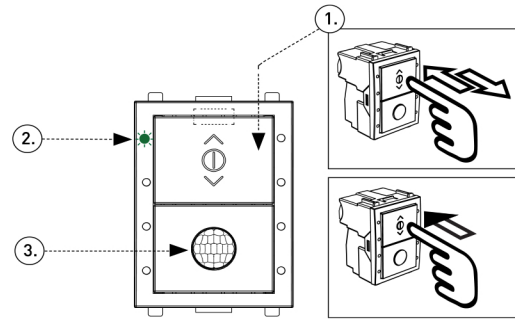

1. Power button / Fade up and down
2. Status LED
3. PIR sensor

Dimensions (mm)



Technical Data

Connections	
DALI:	DIGIDIM terminal block for simple link-through (supplied with 318 unit); 0.5 mm ² – 2.5 mm ² stranded or solid

Electrical data	
DALI consumption:	10 mA
Isolation:	Double isolation

Sensors and status LED	
PIR sensor:	Mounted on fascia
IR receiver:	(36 kHz) for 303 remote control Status
LED:	Top left corner of fascia

Operating conditions	
Ambient temperature:	0 °C to +40 °C
Relative humidity:	Max. 90 %, noncondensing
Storage temperature:	-10 °C to +70 °C

Mechanical data	
Dimensions:	48.4 mm × 35.4 mm × 31.8 mm
Material:	Case: Black flame retardant ABS Fascias: White and black flame retardant ABS
Weight:	35 g
IP code:	IP30 (IP00 at connectors)

Conformity and standards	
Conformity:	
DALI data transfer:	DALI standard IEC 62386, with extensions
EMC emission:	EN 55015
EMC immunity:	EN 61547
Safety:	EN 61347-2-11
Environment:	Complies with WEEE and RoHS directives.

Order codes	
Black:	318B
White:	318W